


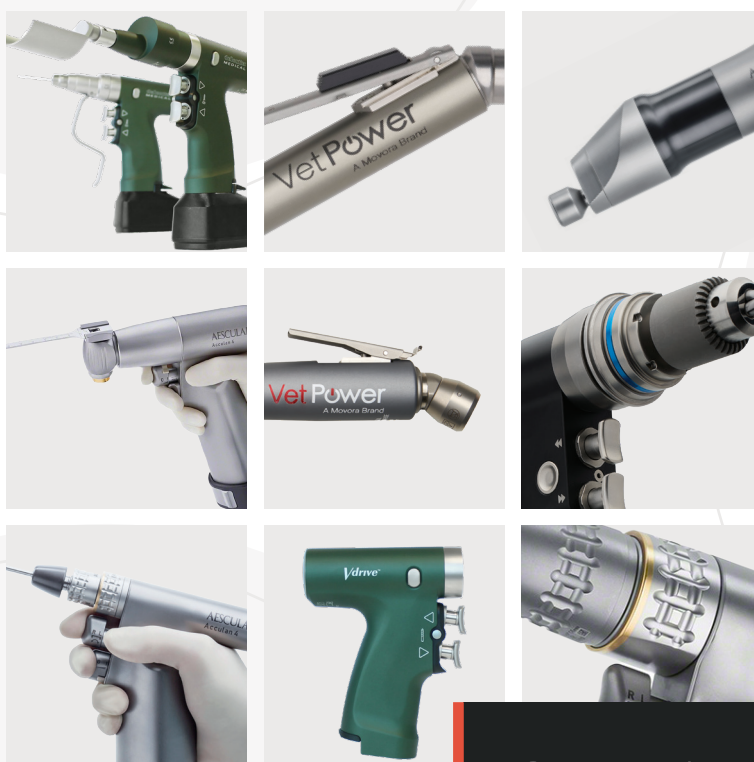

Surgical Power Equipment Catalog

2025

AESCULAP®
Exclusively from Movora

deSouther
MEDICAL

VetPower
A Movora Brand

stryker®

 VETERINARY
ORTHOPEDIC
IMPLANTS

 Movora

Unleashing the Best Veterinary Outcomes. **Together.**

Through our family of brands, Movora is the premier provider of veterinary orthopedic-related products, education, and innovation worldwide. From infection control through science-driven implant design, to precision instruments and surgical options, we are focused on providing products that help ensure the best veterinary outcomes.



Table of Contents

Battery	4
Acculan 4 TPLO	5
DeSoutter Linear Straight Case TPLO Saw	7
VOI VLS 7400	9
DeSoutter Vdrive	11
Acculan 4 Mini	14
Acculan 4 Large Bone	17
VetPower OmniOS	20
Stryker CD3 4300	23
Stryker 4200	26
VetKISS Micro Drill	28
Electric	29
DeSoutter TPLO Oscillating Saw	30
Aesculap Elan 4 Electro	31
Air	33
VetPower Pneumatic TPLO Saw	34
Pneumatic Accessories	35
VetPower Micro Drill	36
Accessories	37
TPLO/CBLO Blades	38
Drill Bits	39
Sterilization Cases	41
Reference Charts	43

The background of the page features several thick, light-grey, wavy lines that flow across the white space, creating a sense of movement and depth. These lines are positioned in the upper left, lower left, and right-hand areas of the page.

Battery Power



Acculan 4 TPLO > Exclusively from Movable

Product Features:

- Balanced - designed for a 90° precision cut
- Titanium shaft
- Variable speed
- For TPLO & CBLO procedures - universal hub design
- Uses both NiMH (GA666) or Li Ion (GA346) batteries
- Ergonomic Design
- 1 Year Warranty

Item #: **GT666**

**For more information regarding warranties for power equipment, please visit Movable.com or contact your sales representative.*

Starter Available:

GT666 TPLO Saw Kit


Set Screw

Item #:
TA004103



Hex Key

Item #:
GB020R



Funnel

Item #:
GA678



Weight	Max Power	DC Voltage	Oscillation Freq.	Oscillation Angle	Autoclavable
1.48 kg	220 W	9.6 V	15,000 1/min	6.5°	✓

Starter Set Includes

Starter Set

Item #	Description	Quantity
GT666	Acculan 4 TPLO Saw	1
GA346	Acculan 4 Lithium Ion Battery, Short	2
GA678	Acculan Sterile Funnel	1
GB020R	Hexagonal Key Standard	1
TA004103	Acculan TPLO Saw Blade Colette Set/ Clamp Screw	1
GA675	Acculan Battery Compartment Cap	1
GA320	Acculan 4 Charging Unit	1
GA059	Sterilit M Oil 50 ml	1

Sterilization Case Options Available (Contact your Movora representative for details)



Accessories

Accessories

Item #		Description
GA346		Li-Ion Battery • Same design as NiMH batteries • Compatible with Acculan 3Ti Surgical Drill and Acculan 3Ti TPLO/CBLO Saw • More power and reliability with reduced memory effects seen in NiMH batteries • 9.9 V • Energy content 10.89 Wh • 120mm x 43mm x 50mm
GA675		Battery Cap
GA678		Sterile Funnel
GA320		Dual Battery Charger • Compatible with both NiMH GA666 and Li-Ion GA346 batteries • Smaller footprint than original charger • Mains voltage range: 100V to 120V 220V to 240V • Current consumption: 0.8 A (100V to 120V) 0.5 A (220V to 240V) • Charge current max: 1.2A • Weight 2.3 kg • Comes with power cord (Item #: TE735)

Blades

View the complete line of Aesculap® TPLO Blades at movora.com

Blades

Item #	Description
GC538R	TPLO Blade 12 mm
GC539R	TPLO Blade 15 mm
GC544R	TPLO Blade 18 mm
GC545R	TPLO Blade 20 mm
GC546R	TPLO Blade 24 mm
GC547R	TPLO Blade 27 mm
GC548R	TPLO Blade 30 mm





DeSoutter Linear Straight Case TPLO Saw

Product Features:

- DeSoutter Straight Case Modular TPLO
- Utilizes all DeSoutter V-MBQ attachments
- Powered by sterile or aseptic batteries
- Class Leading Power to Weight Ratio
- CPM = 13,500

Item #: **1293774**

**For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.*

DC Voltage	Speed	Oscillation Angle	Autoclavable
14.6 V	0 - 13,500 rpm	6°	✓

Accessories

For DeSoutter blade options, please see our Saw Blade Brochure:



Accessories

Item #		Description	Speed (rpm)	Cannulation (mm)
18320		Jacobs Chuck (1/4") Keyed	0 - 1350	4.4
18330		Small A.O. Synthes®/ASIF	0 - 1350	2.55
18440		Jacobs Reamer (1/4") Keyed	0 - 330	4.4
18300		Small Sagittal Saw	0 - 20000 cpm	Accepts S-88 Blades
18270		TPLO Oscillating Saw Universal Triangular Hub*	0 - 13500 cpm	Uses Set Screw (3) 670433
18690		TPLO Oscillating Saw Synthes®	0 - 13500 cpm	n/a
18310		Wire Driver 0.7 - 4.0 mm Wire Capacity	0 - 1350	4.0



Battery Options

Aseptic Battery Charger

Product Features:

- Single bay option available
- Multi-Bay Option - Requires minimal user input - simply insert the battery(s) and the BC-700 will charge, recover, and recondition to its optimum state



4 Bay Item #: 16230
Single Bay Large Item #: 18010

Batteries

Item #		Description	Model
17920		Large Aseptic Battery Pack	AB-704 capacity (mAh) 2000 14.4 V
18860		Large Aseptic Battery Housing	AH-704
18110		Large Aseptic Battery Shield	AS-704



VOI VLS 7400

Product Features:

- Linear TPLO saw
- Progressive trigger
- Trigger lock
- Universal triangular blade hub
- Aseptic battery system
- 1 Year Warranty
- Ergonomic Design




Item #: VLS7400K

**For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.*

Weight	Max Power	DC Voltage	Speed	Rotation	Autoclavable
900 g $\pm$ 10%	90 W	9.6 V	16,000 rpm $\pm$ 10%	Oscillation	✓

Starter Set Includes

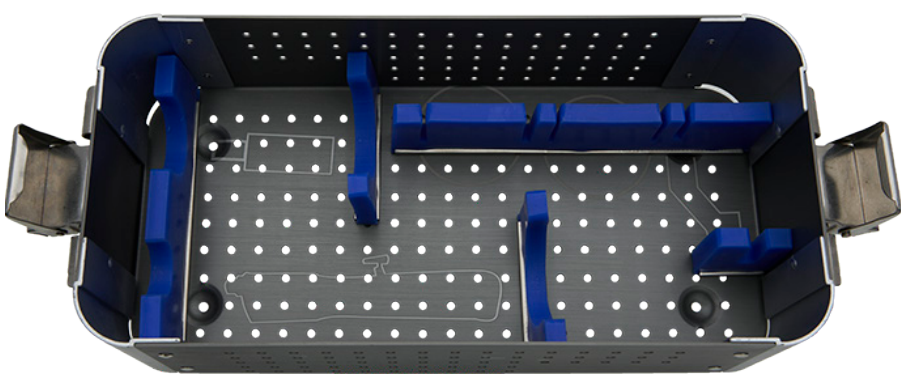

VLS 7400-06



VLS 7400



VLS 7400-04



VLS 7400-01



VLS 7400-03




VLS 7400-05



VLS 7400-02

Starter Set - VLS 7400

Item #	Description	Quantity
VLS 7400	Linear TPLO Saw with Cap	1
VLS 7400-01	Battery Pack - NiMH DC 9.6 V - 90 Day Warranty	1
VLS 7400-02	Single Bay Battery Charger	1
VLS 7400-03	Nylon Locking Set Screw, pkg/3	1
VLS 7400-04	Transfer Kit	1
VLS 7400-05	4 mm L Shaped Hex Wrench, Stainless Steel	1
VLS 7400-06	Anodized Case for VLS 7400 TPLO Saw Kit	1

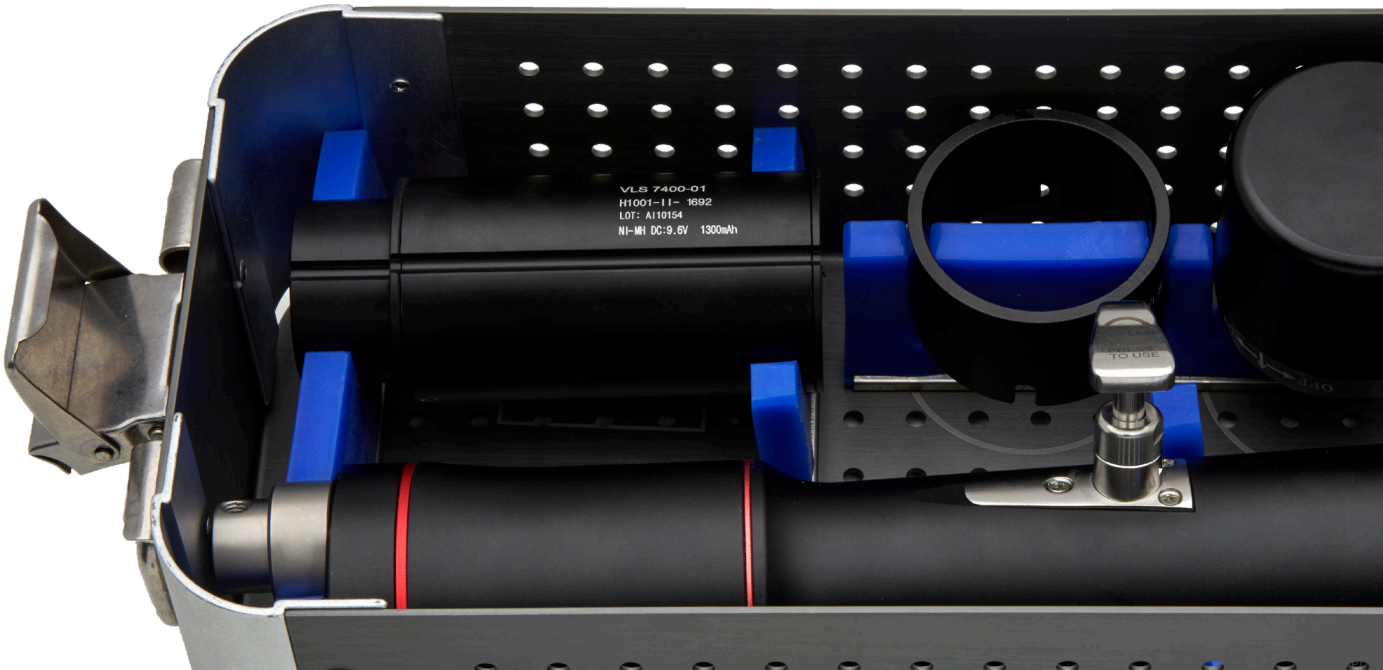



DeSoutter VDrive System

Product Features:

- Multi-position TPLO attachment to accommodate TPLO/CBLO
- Handpiece offers 2 different drilling modes for drilling and tapping
- Fully Cannulated
- Lithium Ion battery technology offers longer run time and withstands repeated hand washing and autoclaving*
- Multiple and single bay charging stations available
- Aseptic Battery, housing, shield, and charging adapter also available
- Use with (VDRIVE TRAY) and (TRAY CASE-P)
- Also available to use with EverGreen Sterilization Containers: EVG VDRIVE TRAY and Wide/Tall EverGreen Container
- Use with set screw (code 670433 x 3, used with wrench key 670423)
- Limited warranty**

Item #: **1291884 - Handpiece only**
Blades Sold Separately

 **DeSoutter Mineral Oil Lubricant, 50 ml Bottle**
Item #: **12570**



DC Voltage	Speed	Reaming Speed	Chuck Capacity	Rotation	Autoclavable
14.6 V	1350 rpm ¹	330 rpm ¹	0.5 - 6.4 mm	R&L, Oscillation	✓

*For autoclavable batteries only - 17210 / 17220

**For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.

Starter Set Includes



For DeSoutter blade options, please see our Saw Blade Brochure:



Starter Set

Item #	Description	Quantity
1291884	DeSoutter V-MBQ-708 V-drive Large Bone Twin Trigger Handpiece - 1 Year Warranty	1
18270	DeSoutter TPLO Saw Head Attachment for V-MBQ-708 Handpiece	1
18300	DeSoutter V-NQ-707 Sagittal Saw Attachment for V-MBQ-708 Handpiece	1
18310	DeSoutter V-WQ-707 Wire Driver for V-MBQ-708 Handpiece - 1 year warranty	1
18330	DeSoutter V-DQ-708 QCK Small Drill Attachment - 1 Year Warranty	1
18320	DeSoutter V-DQ-708-JAC Drill Head 1/4" Chuck, Jacobs for V-MBQ-708 Handpiece 1 year warranty	1
S88-100	DeSoutter Stericut Sagittal Blade, DeSoutter Hub, 25X10X 0.6MM	1
S88-108	DeSoutter Stericut Sagittal Blade - Standard - 15 mm x 22 mm x 0.60 mm	1
S88-153	DeSoutter Stericut Sagittal Blade - Standard - 6 mm x 22 mm x 1.0 mm	1
16230	DeSoutter BC-700 4-Bay Charger fitted with CA-703 for use with AB-703/704	1
17920	DeSoutter AB-704 Large Li-Ion Aseptic Battery Pack Capacity 14.6V (mAh) 2000	2
18860	DeSoutter V-AH-704 Large Aseptic Battery Housing	2
18110	DeSoutter AS-704 Large Aseptic Battery Shield	2
600006	Utility Brush, Dual End, 7"	1
600005	Cannulation Brush, 6 mm Dia x 12"	1
12570	Mineral Oil Lubricant, 50ml Bottle	1

Sterilization Case Options Available (Contact your Movora representative for details)

Power Supply

Ideal when electric power is preferred or as a backup when battery is depleted.

Power Supply

Item #	Description
17870	Power Unit
15720	Corded Module



Accessories

Accessories

Item #		Description	Speed (rpm)	Cannulation (mm)
18320		Jacobs Chuck (1/4") Keyed	0 - 1350	4.4
18330		Small A.O. Synthes®/ASIF	0 - 1350	2.55
18440		Jacobs Reamer (1/4") Keyed	0 - 330	4.4
18300		Small Sagittal Saw	0 - 20000 cpm	Accepts S-88 Blades
18270		TPLO Oscillating Saw Universal Triangular Hub*	0 - 13500 cpm	Uses Set Screw (3) 670433
18690		TPLO Oscillating Saw Synthes®	0 - 13500 cpm	n/a
18310		Wire Driver 0.7 - 4.0 mm Wire Capacity	0 - 1350	4.0



Battery Options

Aseptic Battery Charger

Product Features:

- Single bay option available
- Multi-Bay Option - Requires minimal user input - simply insert the battery(s) and the BC-700 will charge, recover, and recondition to its optimum state



4 Bay Item #: 16230
Single Bay Small Item #: 18000
Single Bay Large Item #: 18010

Batteries

Item #		Description	Model
17910		Small Aseptic Battery Pack	AB-703 (capacity mAh) 2000 10.95V
18850		Small Aseptic Battery Housing	AH-703
18100		Small Aseptic Battery Shield	AS-703
17920		Large Aseptic Battery Pack	AB-704 (capacity mAh) 2000 14.4 V
18860		Large Aseptic Battery Housing	AH-704
18110		Large Aseptic Battery Shield	AS-704

*Uses Slocum blades



Acculan 4 Mini > Exclusively from Movora

Product Features:

- Can be used for small fragment Osteosynthesis as well as for intramedullary reaming
- Wide range of attachments enable flexible usage of the small drill with common reaming (intramedullary) and drilling tools
- For use with Acculan 4 Li-Ion battery (CODE: GA346) or NiMH (CODE: GA666)
- Attachments are compatible with the ELAN 4 system
- 20% lighter & smaller profile than predecessor 3Ti
- Ergonomic Design
- 1 Year Warranty

Item #: **GA344**

**For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.*



Lubricant

- Refer to user manual for proper instructions
- Oil: **GA059** | Spray: **GB600**



Full selection of compatible “GP” blade available at Movora.com. Scan the saw blade brochure for detailed selection:



Weight	Max Power	DC Voltage	Speed	Rotation	Autoclavable
840 g ± 10%	85 W	9.6 V	1250 rpm ⁻¹	R&L, Oscilation	✓

Starter Set Includes



BATTERY

Starter Set

Item #	Description	Quantity
GA344	Acculan 4 Small Drill Handpiece	1
GA675	Acculan 4 Battery Cover for Mini Drill & TPLO Saw	1
GA346	Acculan 4 Lithium Ion Battery, Short	2
GB884R	Acculan 4 Small Drill Attachment - AO	1
GB881R	Acculan 4 Large Jacobs Drill Attachment - For GA344/GA844	1
GB894R	Acculan 4 K-Wire Attachment	1
GB891R	Acculan 4 Sagittal Saw Attachment	1
GA320	Acculan 4 Charging Unit	1
TE735	Universal Power Cord 12' (3.5m) Long	1
TA011944	Acculan 4 Cleaning Brush	1
GB600880	Acculan 4 Oilspray Adapter for GA344/GA844	1
GB600	Sterilit Power Systems Oil Spray 300 ml	1
GA059	Sterilit M Oil 50 ml - For Motor Care	1




Contact your Movora sales representative for EverGreen Sterilization options

Accessories

Full selection of compatible “GP blades” available at Movora.com. Scan the saw blade brochure for detailed selection:



Accessories

Item #		Description	Speed (rpm)	Max Torque (Nm)	Cannulation (mm)
GB881R		LG Jacobs Attachment Chuck Range: 0.5 to 7.4 mm	1,250	2	3.2
GB882R		Small Jacobs Attachment Chuck Range: 0.5 - 4 mm	1,250	2	3.2
GB871R		AO Reamer* <i>*For Intramedullary reaming only</i>	320	5	3.2
GB884R		Small QCK Drill	1,250	1.5	2.8
GB891R		Sagittal Saw <i>Compatible with “GP” blades</i>	15,750		
GB894R		K-Wire Attachment Range: 0.6 - 3.2 mm	1,250		3.2





Acculan 4 Large Bone > Exclusively from Movora

Product Features:

- Rounded organic shape of the grip area
- Sleek handle incorporates the battery for less bulk
- Attachments for acetabular reaming, intramedullary reaming, drilling, K-wire and small sagittal saw blades up to 50 mm length
- Color coding of locking sleeve for easy identification of drill and reamer attachments
- **Uses GA676 batteries and GA320 Charger**
- Ergonomic Design
- 1 Year Warranty

Item #: **GA330**

**For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.*



Lubricant

- Refer to user manual for proper instructions

Oil: **GA059** | Spray: **GB600**




Full selection of compatible additional “GC” blades available at Movora.com. Scan the saw blade brochure for detailed selection:



Weight	Max Power	DC Voltage	Speed	Rotation	Autoclavable
1,250 g ±10%	250 W	9.6 V	1,000-1,250 rpm	R&L, Oscillating	✓

Starter Set Includes

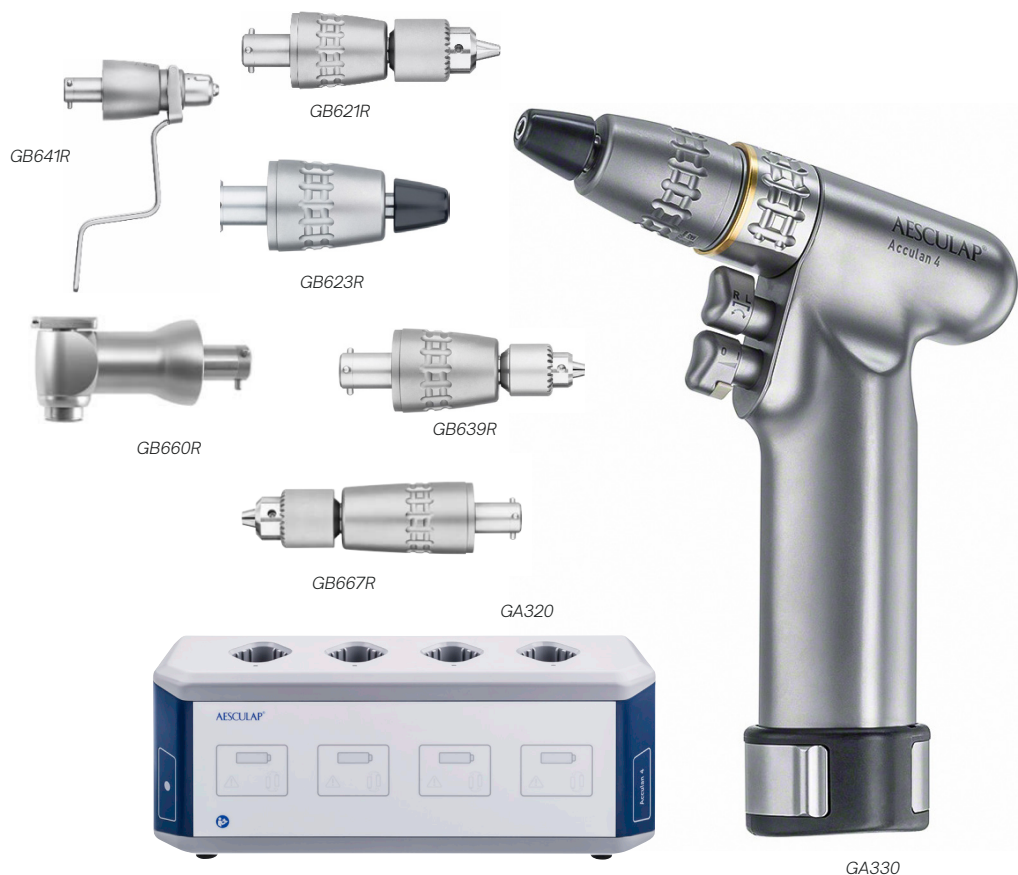

Starter Set

Item #	Description	Quantity
GA330	Acculan 4 Large Drill, Includes Funnel, Rinsing Adapt, OilSpray Adapt, Wire Guide	1
GB621R	Acculan 4 Large Jacobs Large Drill Attachment	1
GB623R	Acculan 4 Large Drill Attachment - QCK	1
GB639R	Acculan 4 Small Jacobs Chuck w/Key Large Drill Attachment	1
GB641R	Acculan 4 Large Drill K-Wire Attachment	1
GB660R	Acculan Sagittal Saw Attachment	1
GA676	Acculan NIMH Battery, Long	2
GA675	Acculan Battery Cover for Mini Drill & TPLO Saw	1
GA320	Acculan 4 Charging Unit w/Power Cord	1
GC207R	VOI Oscillating Saw Blade 25 mm x 5 mm, x 0.5 mm	1
GC209R	VOI Oscillating Saw Blade 35 mm x 10 mm x 0.5 mm	1
GC215R	VOI Oscillating Saw Blade 50 mm x 10 mm x 0.5 mm	1
TA011944	Acculan 4 Cleaning Brush	1
GB600	Sterilit Power Systems Oil Spray 300 ml	1
GA059	Sterilit M Oil 50ml - For Motor Care	1

Accessories

For Aesculap blade options, please see our Saw Blade Brochure:



Accessories

Item #		Description	Speed (rpm)	Max Torque (Nm)	Cannulation (mm)
GB621R		LG Jacobs Chuck Chuck Range: 0.5 - 7.4 mm	1,000	5	4.0
GB639R		SM Jacobs Chuck Chuck Range: 0.5 - 4.0 mm	1,250	4	4.0
GB623R		AO-Small	1,250	4	2.8
GB660R		Sagittal Saw	17,000		
GB641R		K-Wire Attachment 0.6 - 4.0 mm	1,250		
GB667R		Reamer Attachment Large Jacobs Chuck Chuck Range: 0.5 - 7.4 mm	0-250		4.0





VetPower OmniOS

Product Features:

- Versatile handheld power
- Multi-functional - various attachments available
- Li-Ion Battery Powered
- Aseptic battery-driven power system
- Class-leading power-to-weight ratio
- Heavy-duty construction
- Multi-Position TPLO Attachment to accommodate TPLO/CBLO

Item #: VPD1-HP

**For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.*

 Lubricant

- Refer to user manual for proper instructions


Oil: 12570

For OmniOS blade options, please see our Saw Blade Brochure:



Weight	Max Torque (Nm)	DC Voltage	Speed	Rotation	Autoclavable
821 g	6.6 Nm (Drilling) 21 Nm (Reaming)	14.4	1,200 RPM (Drilling) 12,000 RPM (Cutting)	R&L, Oscillation	✓ (Steam Sterilization Only)

Starter Set Includes

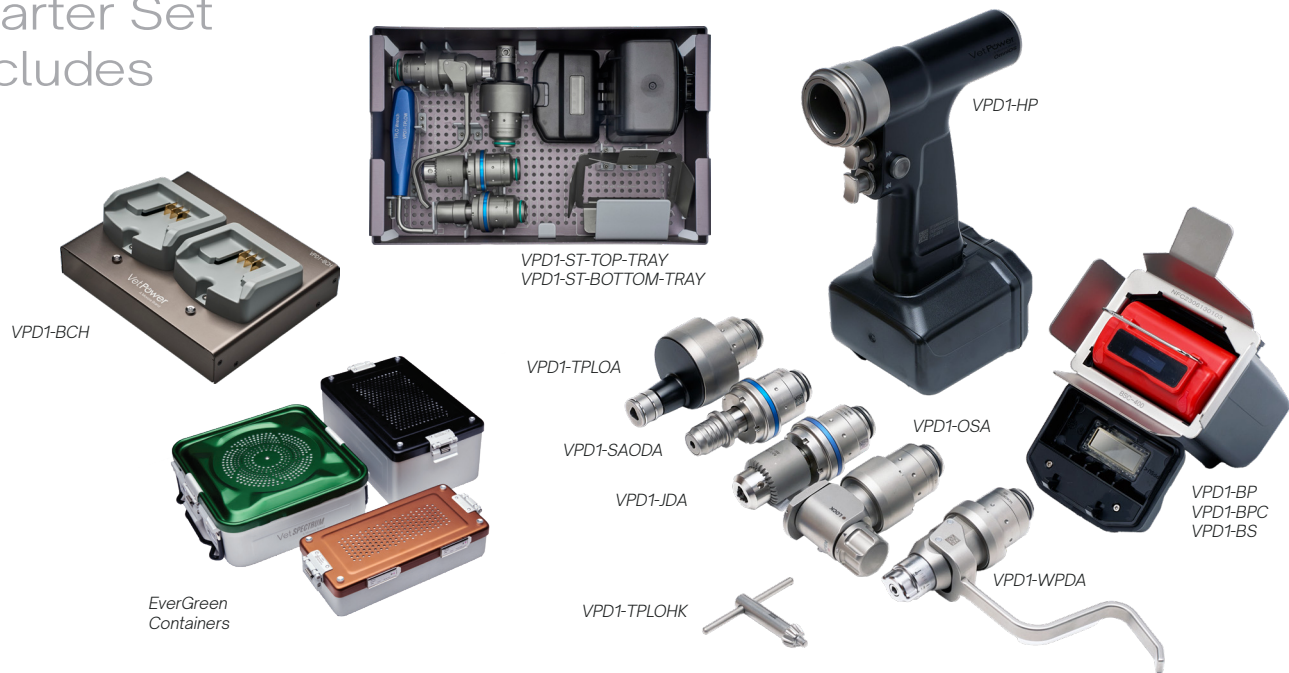

Starter Set

Item #	Description	Quantity
VPD1-HP	VetPower OmniOS Handpiece	1
VPD1-JDA	VetPower OmniOS Jacobs Drill Attachment (w/ Key)	1
VPD1-OSA	VetPower OmniOS Oscillating Saw Attachment	1
VPD1-BP	VetPower OmniOS Battery	2
VPD1-BPC	VetPower OmniOS Battery Casing	2
VPD1-BS	VetPower OmniOS Battery Shield	1
VPD1-BCH	VetPower OmniOS Charger	1
VPD1-SAODA	VetPower OmniOS Small AO Drill Attachment	1
VPD1-WPDA	VetPower OmniOS K-Wire/Pin Driver Attachment	1
VPD1-TPLOA	VetPower OmniOS TPLO Saw Attachment (w/ Wrench)	1
PW124-C206-OM	VetPower Power Cord, 6 Foot, Medical Grade, 16 AWG 13A 125V for Omni	1
VP-SMLS-3111	VetPower Sagittal Saw Blade - 25.0 mm (L) x 9.0 mm (W) - 3111	1
VP-SMLS-3206	VetPower Sagittal Saw Blade - 34.5 mm (L) x 12.0 mm (W) - 3206	1
VP-SMLS-3411	VetPower Sagittal Saw Blade - 11.5 mm (L) x 9.0 mm (W) - 3411	1
12570	Mineral Oil Lubricant, 50 ml Bottle	1
600005	Cannulation Brush, 6 mm Dia x 12"	3
600006	Utility Brush, Dual End, 7"	1
VPD1-ST-TOP-TRAY	OmniOS Sterilization Tray for EvG Wide Tall Container - Top Tray	1
VPD1-ST-BOTTOM-TRAY	OmniOS Sterilization Tray for EvG Wide Tall Container - Bottom Tray	1
*EverGreen Sterilization Container * Contact your Movora sales representative for EverGreen Sterilization options		



Optional Accessories

Accessories					
Item #		Description	Capacity	Speed (rpm)	Cannulation (mm)
VPD1-LAORA		VetPower OmniOS Large Reamer Attachment	N/A	0 - 380	4.0
VPD1-URA		VetPower OmniOS Universal Reamer Attachment	N/A	0 - 380	4.0
VPD1-JRA		VetPower OmniOS Jacobs Reamer Attachment	0.7 - 7.4 mm	0 - 380	4.0
VPD1-LAODA		VetPower OmniOS Large AO Drill Attachment	N/A	0 - 1,200	4.0
VPD1-UDA		VetPower OmniOS Universal Drill Attachment	N/A	0 - 1,200	4.0
VPD1-RSA		VetPower OmniOS Reciprocating Saw Attachment	N/A	4.0 mm	4.0



VetPower
A Movora Brand





Stryker CD3 4300

Product Features:

- Lightweight with slim profile
- Cordless
- Sterilization case available - CODE: SC P
- Limited warranty
- Interchangeable accessories with the S-4200

Item #: S-4300

Refurbished with limited warranty

*For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.

** Stryker CD4 (4405) also available - utilizes the same attachments and batteries as Stryker CD3 (4300) - contact your Movora Sales Representative for more information



Weight	Max Power	DC Voltage	Speed	Rotation	Autoclavable
907 g $\pm$ 10%	85 W	9.6 V	1250 rpm ⁻¹	R&L	✓

Starter Set Includes



Starter Set

Item #	Description	Quantity
S-4300	4300 CD3 Compact Driver Handpiece (Refurbished)	1
S-4100-400	4100-400 Sagittal Saw Attachment (Refurbished)	1
S-4100-62	4100-62 Wire Collet Attachment (.028" - .078") (Refurbished)	1
S-4100-125	4100-125 Pin Collet Attachment, (.078" - .125") (Refurbished)	1
S-4100-110	4100-110 QCK Quick Connect Attachment (Refurbished)	1
S-4100-131	4100-131 1/4" Jacobs Chuck Attachment (Refurbished)	1
10057B	Key for 1/4" Chuck-11 Teeth, K1M, for Jacobs Brand Chuck	1
S-4222-110-V	VOI Aseptic Battery for S4300 Handpiece NiMH 9.6V 2000mAh	2
S-4126-120-V	VOI System 6 Battery Housing for S4300 Handpiece	2
S-4222-130-V	VOI Battery Shield - For S-4300 Handpiece	2
S-4300-CH1	VOI Single Bay Battery Charger for Aseptic Battery S-4222-110-V	1
600004-3	Cannulation Brush, 2mm Dia, #6 French, Nylon, For 3.2 Cannulated Drill Bit-3 Pack	1
SM-3111	Micro-Oscillating & Sagittal Saw Blade 25.0 mm Long x 9.2 mm Wide x 0.48 mm Thick	1
SM-3206	Micro-Oscillating & Sagittal Saw Blade 34.5 mm Long x 12.0 mm Wide x 0.41 mm Thick	1
SM-3411	Micro-Oscillating & Sagittal Saw Blade 11.5 mm Long x 9.0 mm Wide x 0.38 mm Thick	1
SC P	Sterilization Case, 260mm x 180mm x 90mm, Stainless Steel	2
STERIMAT - SC P	Sterimat for SC P - 7" x 10"	1

Accessories

Accessories

Item #	Description	Speed (rpm)	Cannulation (mm)
S-4100-131	Jacob's Chuck	1,250	3.2
			
S-4100-400	Sagittal Saw	15,750	Accepts SM Blades
			
S-4100-110	AO QCK Coupling	15,750	3.2
			
S-4100-125	Pin Collet	1,250	0.78 - .125
			

Accessories

Accessories

Item #	Description	Speed (rpm)	Cannulation (mm)
--------	-------------	-------------	------------------

S-4100-62

Wire Collet

1,250

0.28 - .78



Battery Options

Battery Options

Item #	Description
--------	-------------

S-4222-110-V

Aseptic Battery



S-4222-130-V

Battery Shield



S-4126-120-V

Battery Housing



S-4300-CH1

Single Bay Battery Charger



stryker®





Stryker 4200

Product Features:

- Lightweight with slim profile
- Cordless
- Sterilization case available - CODE: SC P
- Limited warranty

Item #: **S-4200**

Refurbished with limited warranty

**For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.*



stryker[®]

Starter Set Includes



BATTERY

Starter Set

Item #	Description	Quantity
S-4200	Stryker 4200 Cordless Driver 2 Handpiece	1
S-4100-110	Stryker 4100-110 Synthes/ AO QCK Drill Insert	1
S-4100-131	Stryker 4100-131 Jacobs Chuck Insert	1
S-4100-125	Stryker 4100-125 Pin Collet Insert, .078-.125"	1
S-4100-400	Stryker 4100-400 Sagittal Saw Insert	1
S-4100-62	Stryker 4100-62 Wire Collet Insert, .028-.071"	1
10057B	Key for 1/4" Chuck-11 Teeth, K1M, for Jacobs Brand Chuck	1
STR-4000	Stryker Battery for Stryker Model 4112	2
V-2110-120	VOI 2110-112 Battery Charging System for Stryker 2000, 2 STATION	1
S-4110-112 V	4110-112 Battery Charging Adapter for 4112, 4212, 4215 Stryker Batteries	2
PW124-C206	Power Cord, 6 foot, Medical Grade x 1	1
SM-3111	Micro-Oscillating & Sagittal Saw Blade 25.0mm Long x 9.2mm Wide x 0.48mm Thick	1
SM-3206	Micro-Oscillating & Sagittal Saw Blade 34.5mm Long x 12.0mm Wide x 0.41mm Thick	1
SM-3411	Micro-Oscillating & Sagittal Saw Blade 11.5mm Long x 9.0mm Wide x 0.38mm Thick	1
SC P	Sterilization Case, 260mm x 180mm x 90mm, Stainless Steel	1
STERIMAT	Sterimat for SC P - 7" x 10"	1

Accessories

Accessories

Item #	Description
STR-4000	 Stryker Aseptic 4200 Battery - DO NOT AUTOCLAVE - Use with disposable shroud - Single: Item #: 300010 5 Pack: Item #: 30010-5 - Non - Aseptic: STR-4000
V-2110-120	 2-Bay Charging System
S-4110-112-V	Battery Charger Adapter



VetKISS Micro Drill

Product Features:

- Lightweight with slim profile
- Cordless
- Fingertip precision
- Limited warranty

Item #: 70-6005

Refurbished with limited warranty

*For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.

** CR123A photo batteries (3 required) not included. Remove batteries prior to sterilization.


Accessories

Accessories

Item #	Description
70-6006	Battery Loader



Weight	Max Power	DC Voltage	Speed	Rotation	Autoclavable
132 g	3 W	9 V	11,500 RPM	Clockwise	✓

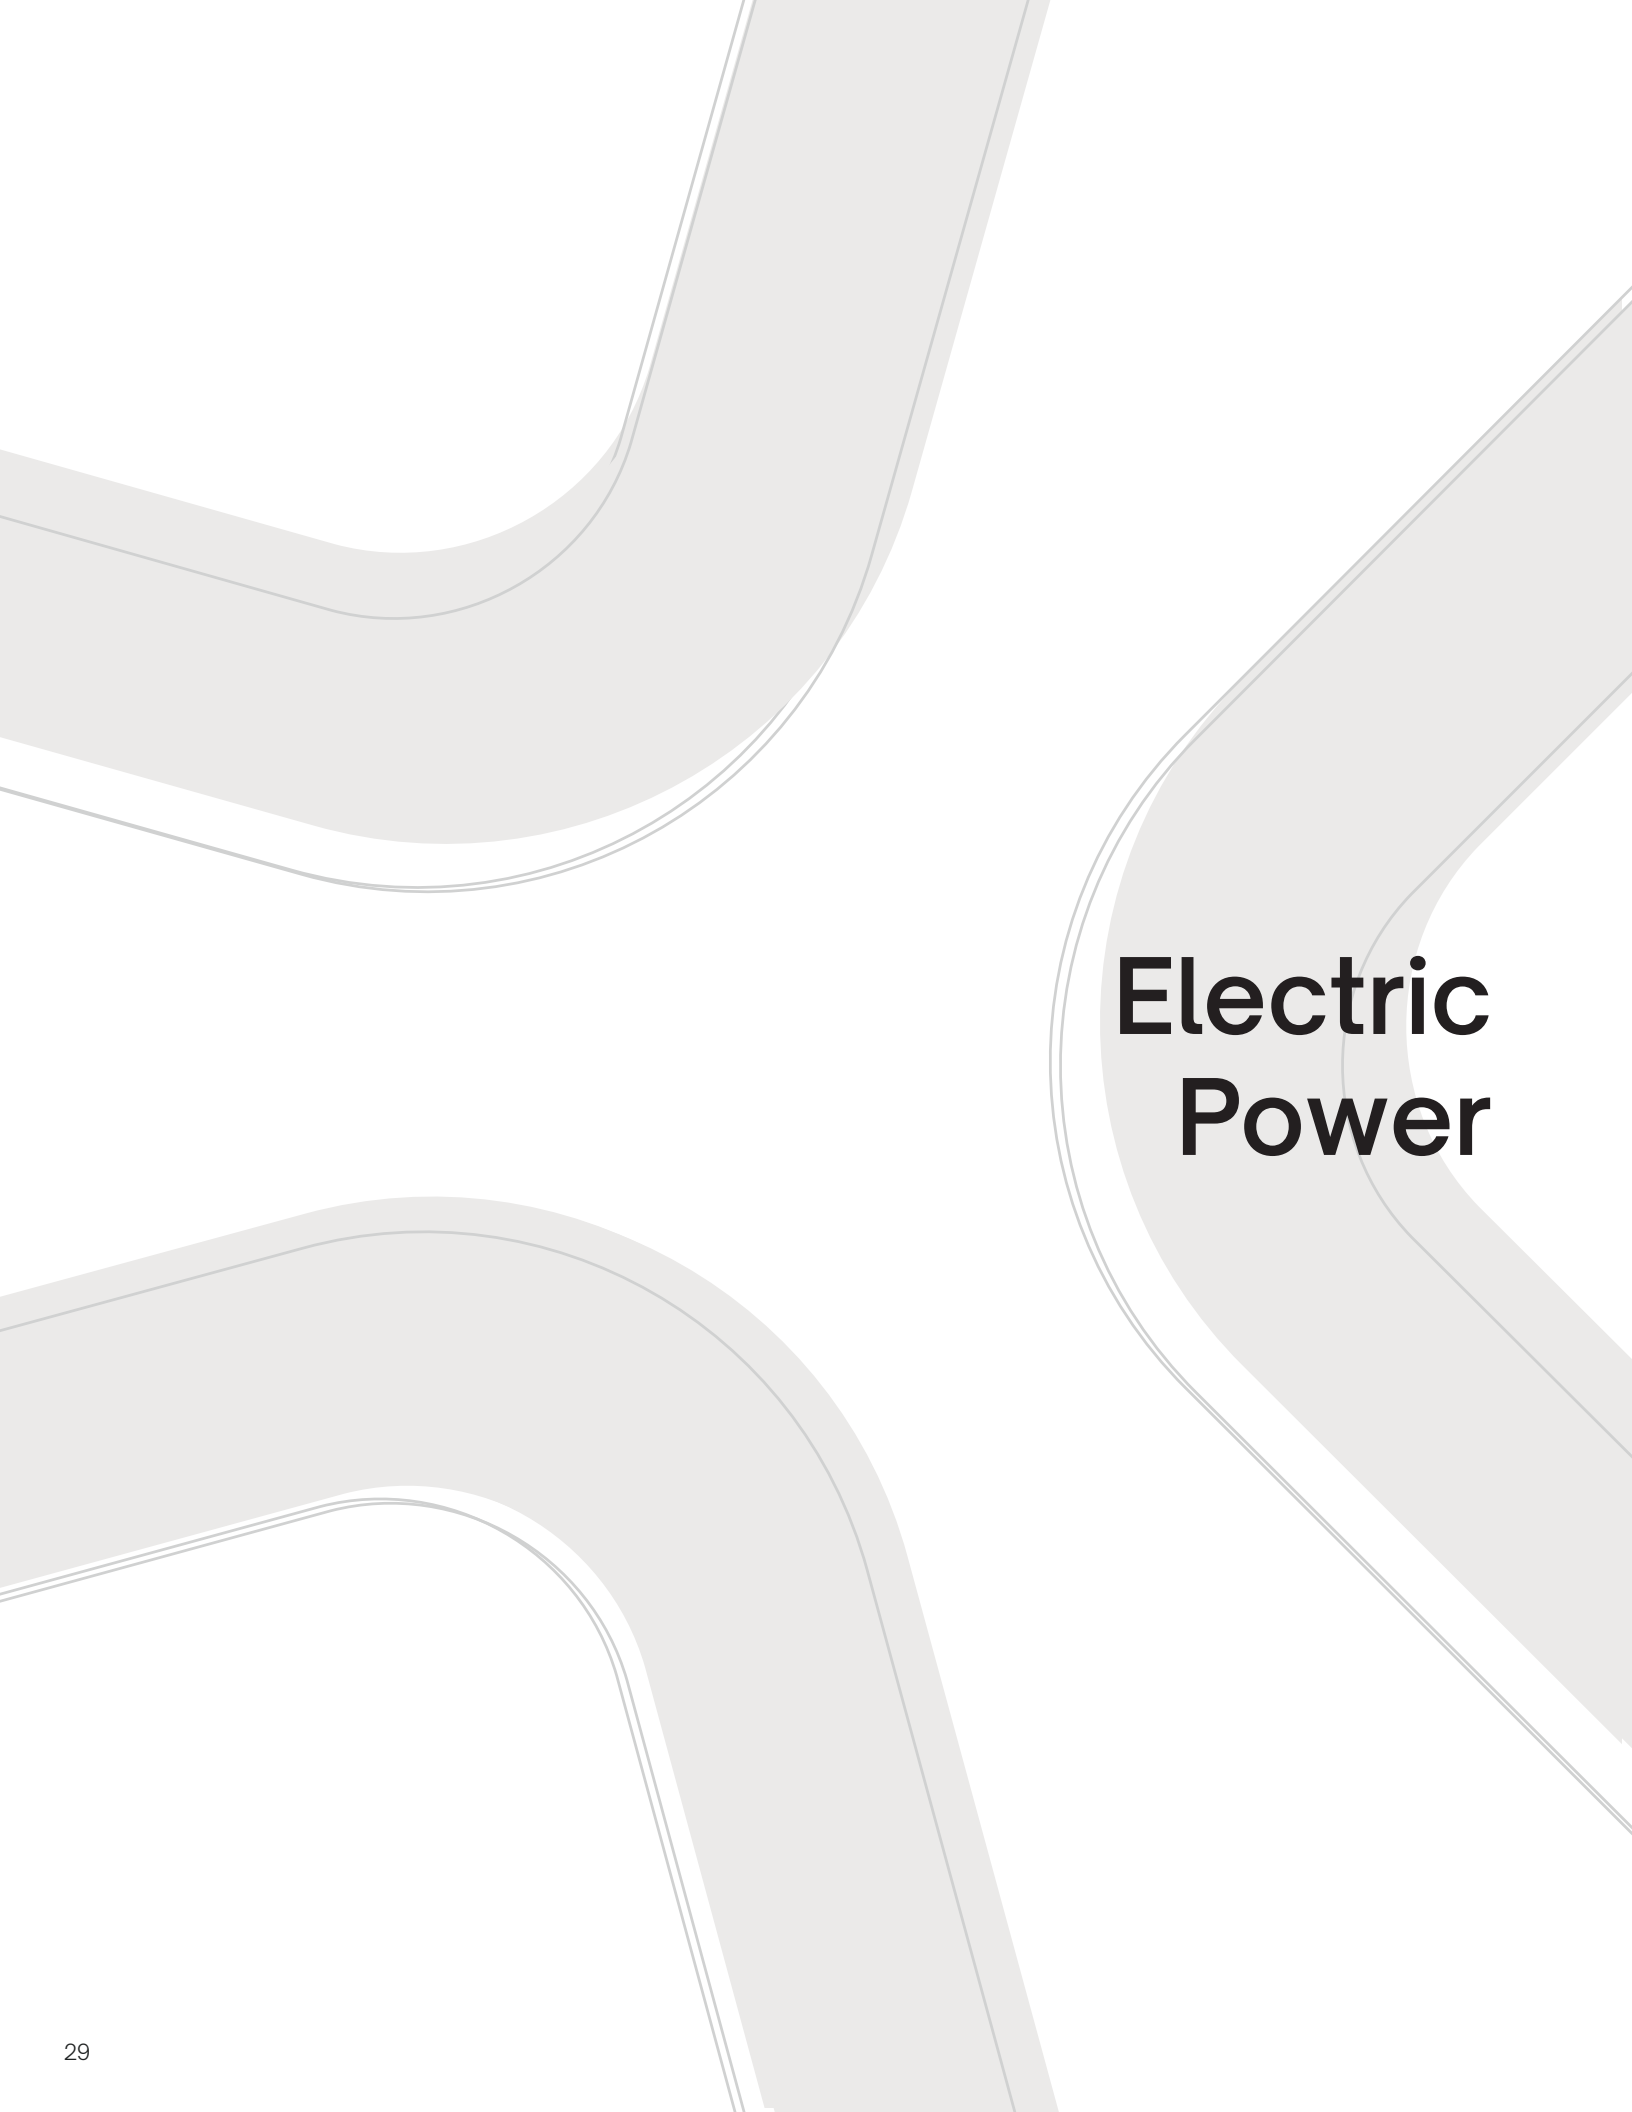

Electric Power



DeSoutter TPLO Oscillating Saw

Product Features:

- Non-Autoclavable - ETO Sterilization only
- Single Speed
- Variety of TPLO Blades sold separately

Item #: 1282774

Starter Set Available:

Set Screws
(In Triangular Hub)

Qty (3) - 10 mm For Top

Item #:
OR-WE-SLSSETSCRW-10

Qty (4) - 5 mm For Bottom
(In Triangular Hub)

Item #:
OR-WE-SLSSETSCRW-5



Hex Wrench

Item #:
53855A42



Universal Triangular Hub

Item #:
316TH



Disposable Shroud
Available
Item #: 300011



Weight	Voltage	Speed	Rotation	Autoclavable
1.3 kg	100 - 120 V	14,000 cpm	Oscillation	X



Elan 4 Electro > Exclusively from Movora

Product Features:

- Quick release attachments
- Handpiece has a round diameter of only 15.8 mm
- Safety mechanism prevents unintentional use
- Ergonomic design

Item #: GA862



For more information on compatible saw blades, please visit the Movora Saw Blade Brochure

Starter Set Includes

Starter Set - Elan 4 Electro

Item #	Description	Quantity
GA862	ELAN 4 Electro Handpiece Standard L7 (1-ring)	1
GA800	ELAN 4 Electro Control Unit w/Power Cord	1
GA805	ELAN 4 Electro Motor Cable w/Hand Control	1
GA806	ELAN 4 Electro Motor Cable	1
GA808	ELAN 4 Electro Foot Control	1
PW124-C206	Power Cord, 6 Foot, Medical Grade	1
GB600860	ELAN 4 Electro Oilspray Adapter	1
GB698R	ELAN 4 Electro Rinsing Adapter	1
GB600	Sterilit Power Systems Oil Spray 300 ml	1
GA262SU	ELAN 4 Spray Nozzle For Handpiece L7 (1-ring)	1
JG285R	Tray with Lid 273 mm x 176 mm x 60 mm	1
GA395SU	ELAN 4 Electro Disposable Tube Set/ 10PK	1
GB866R	ELAN 4 Lateral Burr Guard (1-ring)	1
GP122R	ELAN 4 Rosen Burr 2.7 mm (1-ring)	1
GP126R	ELAN 4 Rosen Burr 4.0 mm (1-ring)	1
GP155R	ELAN 4 Diamond Burr 4.0 mm (1-ring))	1
GP209R	ELAN 4 Neuro Cutter 2.5 mm (1-ring)	1
GA836	ELAN 4 Electro Micro Sagittal Saw	1
GA837	ELAN 4 Electro Micro Reciprocating Saw	1
GA258SU	ELAN 4 Disposable Spray Nozzles	1

Weight	Max Power	Speed	Rotation	Autoclavable
83 g ± 10%	140 W	80,000 rpm	F&R, Pump	✓


Power Supply


Power Supply

Item #		Description
GA800		Elan 4 Electro Control Unit • Motor and foot-control connections on the front of the control unit • Connections coded by color, shape, size and symbol
GA808		Elan 4 Electro Foot Control • Proven ergonomics of the pedal • Rocker switch for pump and forward / reverse selection • Flush irrigation function • Pedal can be disassembled for better and easier cleaning
GA806		Elan 4 Electro Motor Cable • 4 Meters long • High quality plugs • Connections coded by color, shape, size and symbol
GA805		Elan 4 Electro Motor Cable with Handle Control (Sliding Function) 4 meters long
GA804		Elan 4 Electro Motor Cable with Hand Switch (Lever Control) 4 meters long

Accessories & Cleaning

Accessories

Item #		Description
GA837		Elan 4 Electro Micro Reciprocating Saw
GA836		Elan 4 Electro Micro Sagittal Saw
GB692R		Elan 4 Electro Rinsing Device
GA262SU	NOT PICTURED	Elan 4 Spray Nozzle F/I-RG. Handpiece L7 (Not Shown)
GB866R		Elan 4 Lateral Burr Guard
GB698R		Elan 4 Electro Rinsing Adapter
GB600860		Elan 4 Electro Oilspray Adapter
GA395SU		Elan 4 Electro Disposable Tube Set

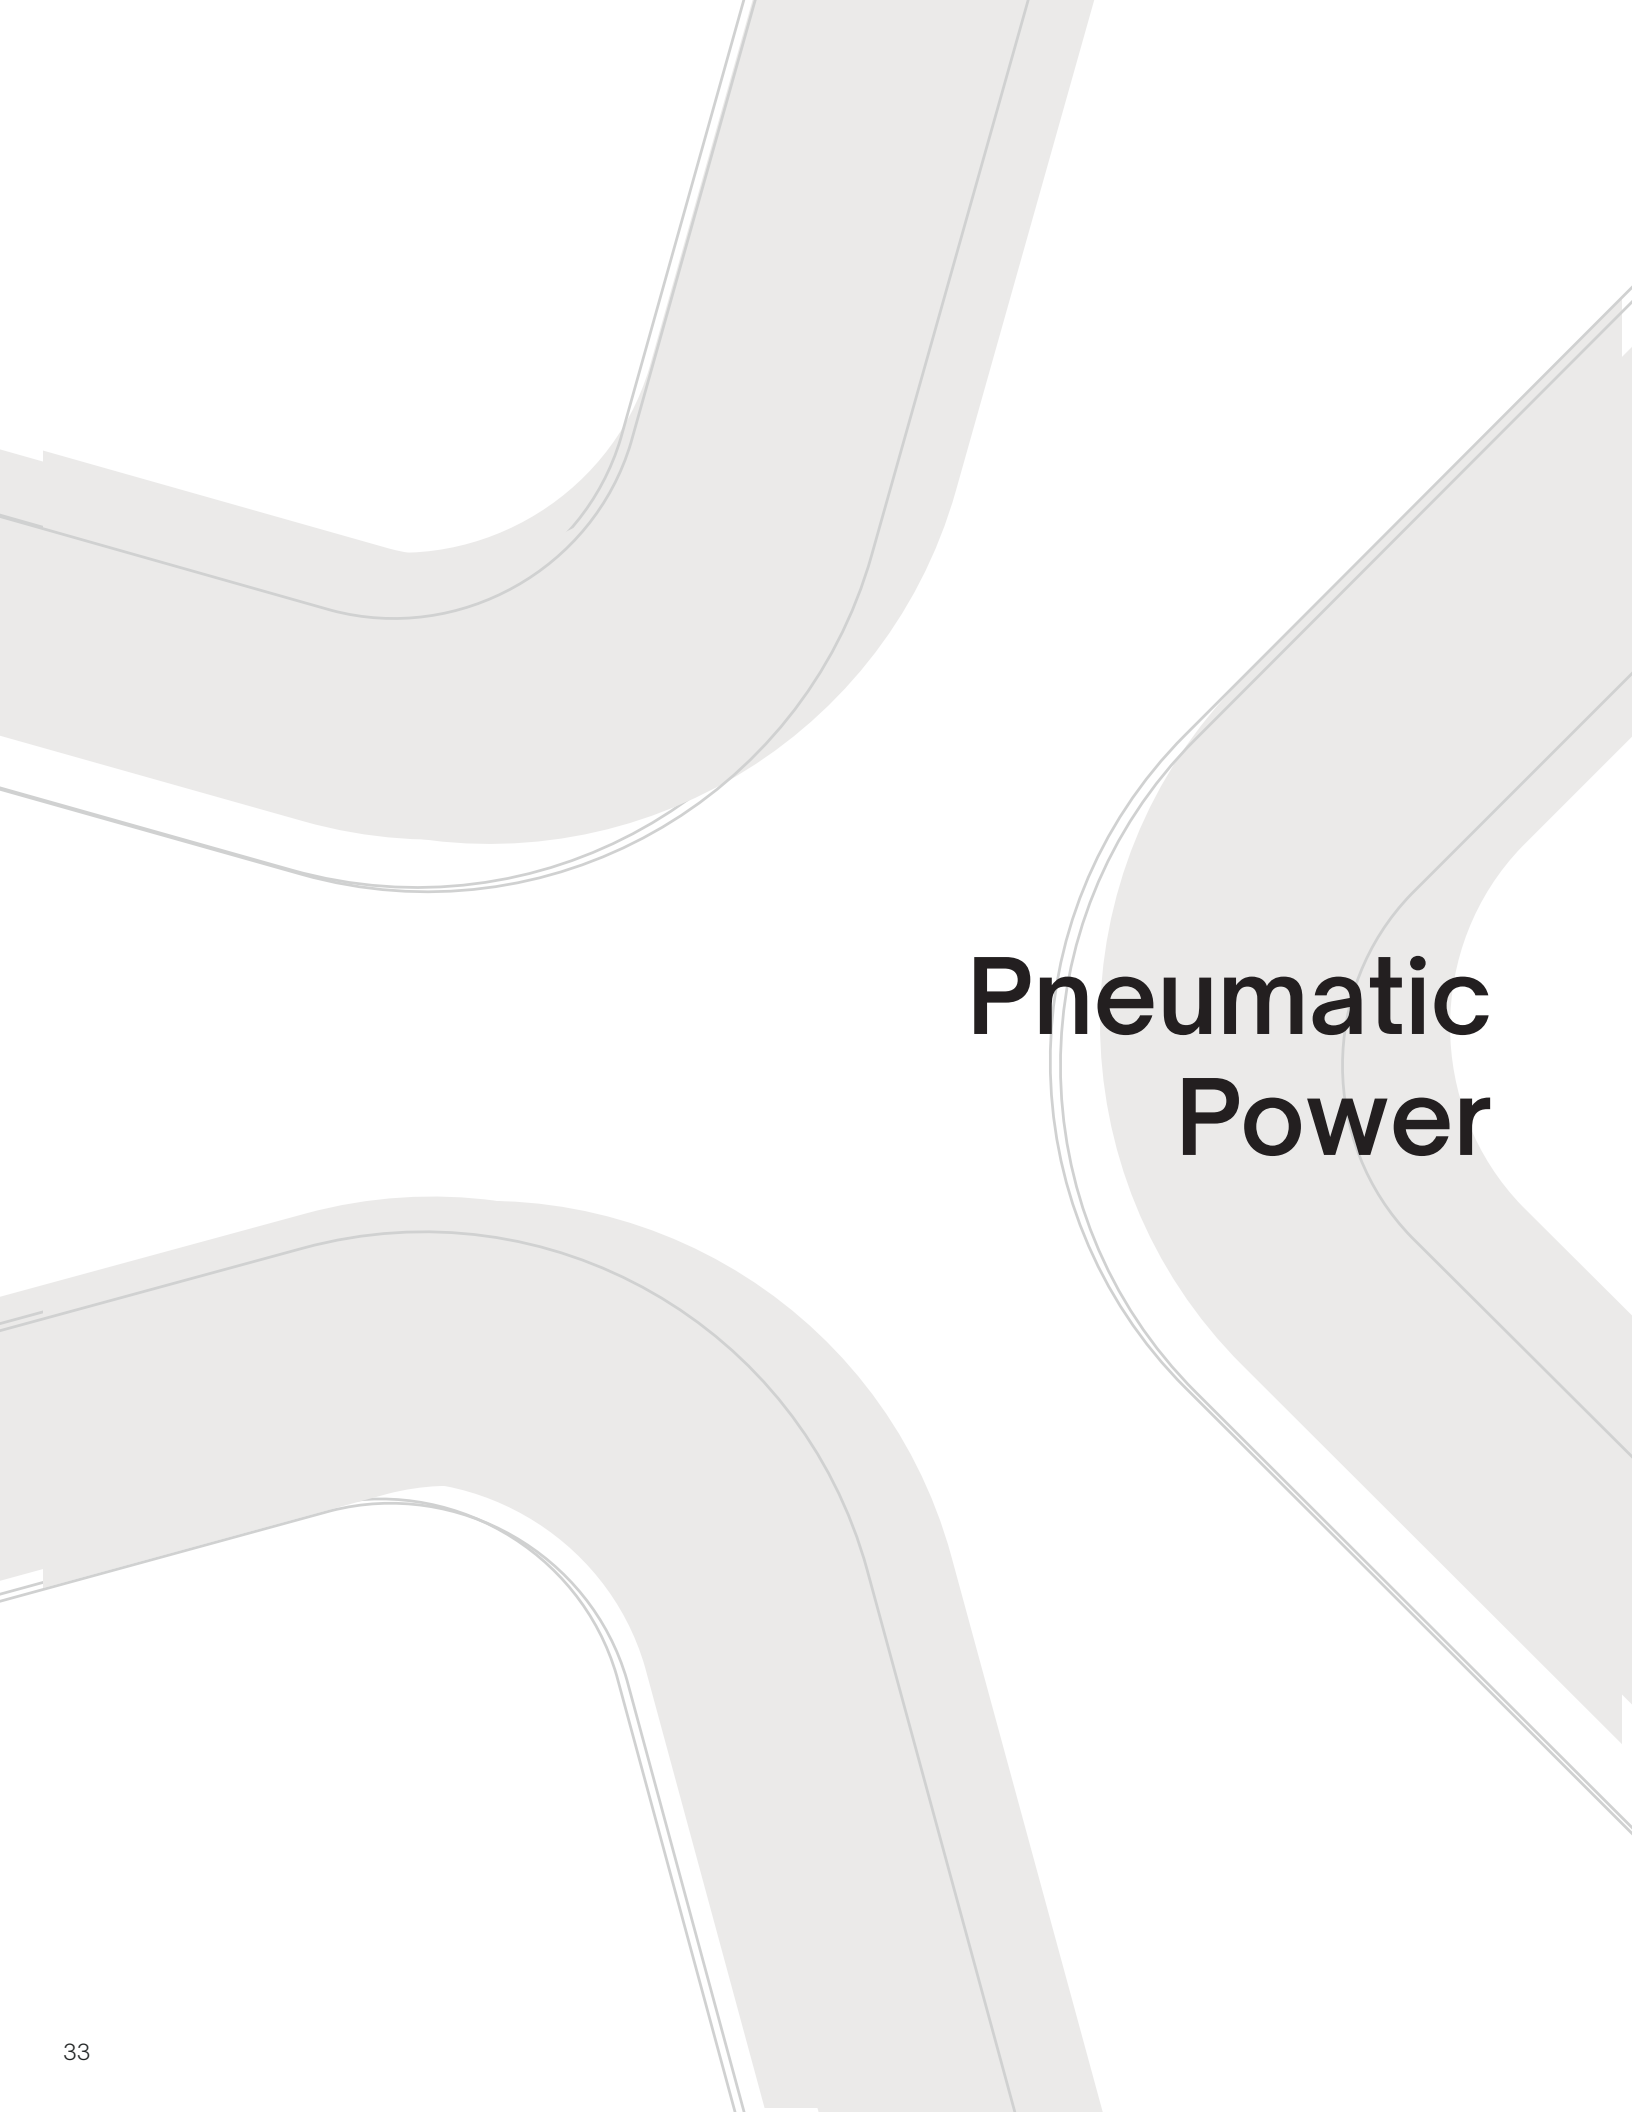

Pneumatic Power



VetPower Pneumatic TPLO Saw

Product Features:

- Universal triangular bladehub fits most crescentic TPLO/CBLO blades
- Single hand operation
- Variable speed control offers maximum precision and accuracy
- TPLO/CBLO Blades sold separately
- 1 Year Warranty

**For more information regarding warranties for power equipment, please visit Movable.com or contact your sales representative.*

Sold Separately:

Set Screws

QTY (Q) - 1/8" Hex Recess

Item #:

1100 SET SCREW-LOCKI



VOI T Hex Key-Wrench

1/8" Stainless Steel

Item #:

11990



VetPower Air Hose

- Male Schrader Connection
- 10 ft. Pneumatic Hose Gen 2
- May require to hose-to-regulator adaptor outside the USA

Item #:

T2100-25



Weight	Operating Pressure	Speed	Rotation	Autoclavable
1.20 lbs. ± 10%	90 psi to 110psi	16,000 cpm (nominal)	Oscillating	✓

Pneumatic Accessories

Accessories

Item

MSH180580




Description

Air/Nitrogen Regulator

- 0-180psi, adjustable pressure
- Single stage, Fits "H" tanks
- Comes fitted with female Air Quick-Connect (SCHRAD-F)
- Accepts 1/4" NPT Schrader Air Quick-Connect

5052-10



Hall Style Hose

3M A201



3M Mini Driver Hose

S-277-5



Stryker Style Hose

M-9000-C



Microaire Hose

SCHRAD-F



Schrader Air Quick Connect

- Has a male thread (1/4" NPT)
- Installs into regulator
- Accepts air hoses with male Schrader end
- Fits Hall & 3M Hoses (Female)

10057B



Jacobs Chuck Keys - 11 Teeth

- Stainless Steel
- Autoclavable
- 11 teeth
- Compatible with all standard power equipment

ZREG-YO-SC16



Y Adapter

Sold as a Y adapter or as individual components

- Use two different pneumatic power tools on the same tank





High Speed Micro Drill

Product Features:

- High Speed Micro Drill
- Lever for throttled control
- Ample cutting power for cutting and sculpting bone
- Compact, lightweight design allows access to small surgical sites

Item #: VP-HSMD-1200

**For more information regarding warranties for power equipment, please visit Movora.com or contact your sales representative.*

For more information regarding compatible burr selections, please visit Movora.com or contact your local sales representative.

Sold Separately:

Medium Bur Guard

Item #:
HSMD 1200-MBG



Long Bur Guard

Item #:
HSMD 1200-LBG



Extra Long Bur Guard

Item #:
HSMD 1200-XLBG



Hose

- Pneumatic hose for TPLO Saw T1100 and T2100, VP-HSMD-1200

Item #:
T2100-25



Weight	Operating Pressure	Speed	Consumption	Autoclavable
7.2 oz. (~204g)	90-110 psi	95,000 rpm (minimum at 100 psi)	6.0 cfm, maximum	✓



Accessories

TPLO / CBLO Blades

Product Features:

- Universal Fit - Triangular hub
- Contoured cutting edge
- Stainless steel
- Offered in Diamond-like Carbon Coating (DLC)



Product Features:

- 50% thinner and finer teeth than conventional offerings
- Cuts bone efficiently and effortlessly
- Provides opportunity to generate less heat intraoperatively
- Universal Fit - Triangular hub
- Stainless steel




TPLO Blade Adapters

VOI TPLO/CBLO Blades

Item # DLC Coated	Size
8 MM TPLO BLADE-DLC	8 mm TPLO Blade
10 MM TPLO BLADE-DLC	10 mm TPLO Blade
12 MM TPLO BLADE-DLC	12 mm TPLO Blade
15 MM TPLO BLADE-DLC	15 mm TPLO Blade
18 MM TPLO BLADE-DLC	18 mm TPLO Blade
21 MM TPLO BLADE-DLC	21 mm TPLO Blade
24 MM TPLO BLADE-DLC	24 mm TPLO Blade
27 MM TPLO BLADE-DLC	27 mm TPLO Blade
30 MM TPLO BLADE-DLC	30 mm TPLO Blade
33 MM TPLO BLADE-DLC	33 mm TPLO Blade

NGD COB TPLO/CBLO Blades

Item #	Size
COB-8S	8 mm Crescentic Osteotomy Blade
COB-10S	10 mm Crescentic Osteotomy Blade
COB-12S	12 mm Crescentic Osteotomy Blade
COB-15S	15 mm Crescentic Osteotomy Blade
COB-18S	18 mm Crescentic Osteotomy Blade
COB-21S	21 mm Crescentic Osteotomy Blade
COB-24S	24 mm Crescentic Osteotomy Blade
COB-27S	27 mm Crescentic Osteotomy Blade
COB-30S	30 mm Crescentic Osteotomy Blade
COB-33S	33 mm Crescentic Osteotomy Blade

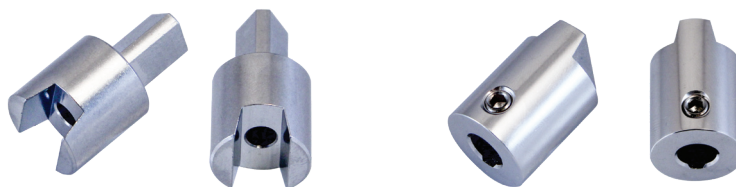

Product Features:

- Adapter allows a Synthes® TPLO saw to accept any triangle collet TPLO blade.

Item #: STS-A

Product Features:

- Adapter allows a Synthes® TPLO saw to accept any triangle hub TPLO blade.

Item #: STS-C

Drill Bits



	Cortical Screws								Cancellous Screws				
Screw Diameter (mm)	1.5	2.0	2.4	2.7	3.5	4.5	5.5		2.0	3.0	3.5	4.0	6.5
Drill Bit Diameter (mm) for gliding hole	1.5	2.0	2.4	2.7	3.5	4.5	5.5		2.0	3.0	3.5	4.0	6.5
Drill Bit Diameter (mm) for threaded hole	1.1	1.5	1.8	2.0	2.5	3.2	4.0		1.1	2.0	2.5	2.5	3.2
Tap (mm)	1.5	2.0	2.4	2.7	3.5	4.5	5.5		2.0	3.0	3.5	4.0	6.5
Hex Driver Size (mm)	1.5	1.5	2.0	2.5	2.5	3.5	3.5		1.5	2.5	2.5	2.5	3.5

Jacobs Drill Bits

Product Features:

- Uses chuck key to tighten bit in power equipment
- Stainless steel

Item #	Diameter (mm)	Length (mm)
0.8 JAC 55	0.8	55
1.1 JAC 45	1.1	45
1.1 JAC 85	1.1	85
1.5 JAC 70	1.5	70
1.5 JAC 128	1.5	128
1.8 JAC 100	1.8	100
2.0 JAC 85	2.0	85
2.0 JAC 128	2.0	128
2.5 JAC 95 (tin coated)	2.5	95
2.5 JAC 127	2.5	127
2.5 JAC 180 (tin coated)	2.5	180
2.7 JAC 85	2.7	85
2.7 JAC 128	2.7	128
2.8 JAC 165	2.8	165
3.2 JAC 130	3.2	130
3.2 JAC 180	3.2	180
3.5 JAC 180	3.5	180
4.0 JAC 127	4.0	127
4.0 JAC 225	4.0	225
4.5 JAC 127	4.5	127
4.5 JAC 180	4.5	180



Jacobs Self-Centering

Item #	Diameter (mm)	Length (mm)
1.5 JAC 85 SC	1.5	85
1.8 JAC 100 SC	1.8	100
2.0 JAC 85 SC	2.0	85
2.5 JAC 95 SC (tin coated)	2.5	95
2.7 JAC 100 SC	2.7	100
2.8 JAC 165 SC	2.8	165

Quick Coupling Drill Bits

Product Features:

- Quick coupling for easy bit changes
- Stainless steel

Item #	Diameter (mm)	Length (mm)
1.1 QCK 60	1.1	60
1.5 QCK 85	1.5	85
1.5 QCK 110	1.5	110
1.8 QCK 100	1.8	100
2.0 QCK 100	2.0	100
2.0 QCK 125	2.0	125
2.4 QCK 125	2.4	125
2.5 QCK 110 (tin coated)	2.5	110
2.5 QCK 180 (tin coated)	2.5	180
2.7 QCK 100	2.7	100
2.7 QCK 110	2.7	110
2.7 QCK 125	2.7	125
2.8 QCK 165	2.8	165
3.2 QCK 145	3.2	145
3.2 QCK 195	3.2	195
3.5 QCK 110	3.5	110
3.5 QCK 195	3.5	195
4.0 QCK 125	4.0	125
4.0 QCK 145	4.0	145
4.0 QCK 195	4.0	195
4.3 QCK 180	4.3	180
4.5 QCK 145	4.5	145
4.5 QCK 195	4.5	195
5.5 QCK 195	5.5	195



Quick Coupling Self-Centering

Item #	Diameter (mm)	Length (mm)
1.5 QCK 85 SC	1.5	85
1.8 QCK 100 SC	1.8	100
2.0 QCK 100 SC	2.0	100
2.5 QCK 110 SC	2.5	110
2.7 QCK 100 SC	2.7	100
2.8 QCK 165 SC	2.8	165

DLC Coated Drill Bits

Diamond-like Carbon

These Quick Coupling (QCK) Improved Performance Includes:

- Superior cutting edge retention
- Low friction – reduces tissue degradation and lowers the level of applied force
- Longer wear – up to 5-10x more uses
- Non-toxic biological compatibility
- Non-stick properties simplify cleaning and sterilization process
- Low reflectivity
- Corrosion and scratch resistant
- Thoroughly tested* in the medical field

Standard End Bits



Our Self-centering drill bits are used to minimize the movement of the drill bit across the bone.



Normal Bit Tip



Self-Centering Bit Tip

Self-Centering Bits

*VOI drill bits are coated with Medthin™ 41 (Cr + CrN + a-C:H) DLC coating, one of the most tested and widely used DLC coatings in the medical field.



Dental Quick Coupling

Product Features:

- Quick coupling for easy bit changes
- Specifically made for dental use

Item

1.1 D QCK
1.5 D QCK

Diameter

1.1
1.5

Length (mm)

52
52

QCK - Adaptor for Power Drills


Item #: SAH.EV001656



1.1 D QCK




1.5 D QCK



Cannulated Drill Bits

Item #	Description
CAN 1.8 120 QCK	1.8 mm Cannulated Quick Coupling Drill Bit, 0.032 Wire - (70.0 mm Working L.)
CAN 2.0 150 QCK	2.0 mm Cannulated Quick Coupling Drill Bit, .045 K Wire - (123.0 mm Working L.)
CAN 2.0 150 QCK DLC	2.0 mm Cannulated Quick Coupling Drill Bit, DLC Coated, .045 K Wire - (123.0 mm Wrk L.)
CAN 2.5 160 QCK	2.5 mm Cannulated Quick Coupling Drill Bit, 0.045 Wire - (110.0 mm Working L.)
CAN 2.7 160 QCK	2.7 mm Cannulated Quick Coupling Drill Bit, 0.045 Wire - (110.0 mm Working L.)
CAN 3.2 170 QCK	3.2 mm Cannulated Quick Coupling Drill Bit, .062 Pin - (120.0 mm Working L.)
CAN 3.2 225 QCK	3.2 mm Cannulated Quick Coupling Drill Bit, .062 Pin/1.16 Wires - (175.0 mm Working L.)
CAN 3.2 225 QCK DLC	3.2 mm Cannulated Quick Coupling Drill Bit, DLC Coated, .062 Pin/1.16 Wires - (175.0 mm WL)
CAN 3.5 225 QCK	3.5 mm Cannulated Quick Coupling Drill Bit, .062 Pin/1.16 Wire - (175.0 mm Working L.)
CAN 4.5 225 QCK	4.5mm Cannulated Quick Coupling Drill Bit, .062 Pin/1.16 Wire - (175.0mm Working L.)

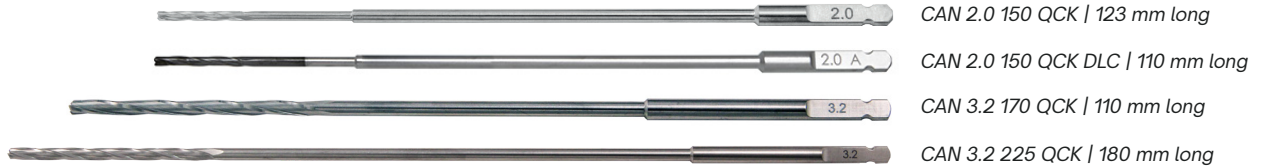

Sterilization Cases



Great for small items!

Micro Sterilization Case

Product Features:

- Length: 69 mm | Width: 43 mm | Height: 9.0 mm
- Sliding Lid
- Stainless Steel

Item #: **SC M**



Micro Sterilization Case Large

Product Features:

- Length: 83 mm | Width: 43 mm | Height: 9.3 mm
- Sliding Lid
- Stainless Steel

Item #: **SC MXL**



Sterilization Case For VDrive Tray

Product Features:

- Length: 370 mm | Width: 194 mm | Depth: 112 mm
- Large anodized sterilization case is perfect for autoclaving power equipment and accessories
- Holds any of the TPLO trays or CBLO trays

Item #: **TRAY CASE - P**



VDrive Tray Case

Product Features:

- Length: 337 mm | Width: 185 mm | Depth: 93 mm
- Autoclavable
- Stainless Steel

Item #: **VDRIVE TRAY**

Sterilization Cases




Sterilization Case

Product Features:

- Length: 260 mm | Width: 180 mm | Height: 90 mm
- Hinged Lid
- Stainless Steel

Item #: SC P

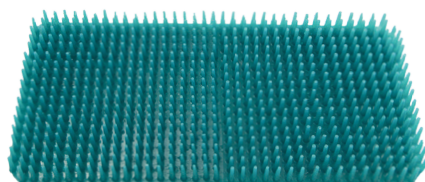


Sterimat For TRAY CASE

Product Features:

- 184.15 mm x 349.25 mm
- Silicone
- 15 mm high

Item #: STERIMAT - TRAY CASE

! Other sizes available at movora.com

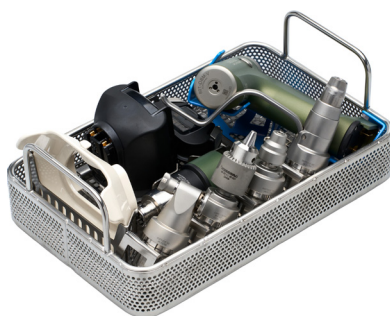

EVG VDRIVE TRAY Steri Tray for V Drive, for Evergreen Container

**For EverGreen Container - Contact your Movora Sales Representative for more information*

Item #: EVG VDRIVE TRAY



OmniOS Sterilization Tray for EvG Wide Tall Container

Item #:

VPD1-ST-TOP-TRAY

VPD1-ST-BOTTOM-TRAY

Reference Charts

Wrench / Key / Set Screw Guide

Wrench / Key	Hex Size	Hex Size	Compatible Set Screw	Usage
53855A42	2.5	13/128"	OR-WE-SLSSETSCRW-10, OR-WE-SLSSETSCRW-5	1282774, 224774, JIGS, STS-A
GB020R	3.0 mm	15/128"	TA004103	Paired with Acculan TPLO saw. Can be used for Acculan saw
MSS 1630 HW	3.6 mm	9/64"	None. MSS 1630 has a non-removable set screw	MSS 1630 HW is the only key with a single use
670423	4.0 mm	5.32"	670433	DeSoutter TPLO attachment
11990	3.175 mm	1/8"	1100 SET SCREW	T2100, T1100

Set Screw	Length	Recess & Size	Compatible Wrench	Compatible Shaft	Usage
OR-WE-SLSSETSCRW-5	5 mm	Hex (2.5 mm)	53855A42	20022	
18270-5MM	5 mm	Hex (2.5 mm)	53855A42	20022	• JIGS (JIG - SMALL and JIG - STANDARD)
OR-WE-SLSSET- SCRW-10	10 mm	Hex (2.5 mm)	53855A42	20022	• DeSoutter TPLO attachment
SS-M5-T15	5 mm	(T15)	None	500037	• STS-A
VLS 7400-03	5 mm	Hex (2.5 mm)	53855A42	20022	• VLS7400
TA004103	8 mm	Hex (3.0 mm)	GB020R	None	Exclusively used for Acculan
670433	15 mm	Hex (4.0 mm)	670423	None	Exclusively used together for the deSoutter TPLO attachment
1100 SET SCREW	6.35 mm	Hex (1/8") (~3.175 mm)	119900	None	T2100 T1100

Pin Diameter Conversion Chart

- The terminology goes from Wire to Pin once we get to 1.16" because "wire" indicates the smaller sizes and "pin" indicates the larger sizes, however; the terms wire and pin are interchangeable
- The (0.062) is the same diameter as the (1.16")
- There is no equivalent "fractions of an inch" measurement for the wire sizes
- Blue font shows how the part number relates to the diameter in decimals of an inch
- Green font shows how the part number relates to the diameter in fractions of an inch

Terminology	SKU	Diameter Fractional / Inch	Diameter Decimal / Inch	Diameter (mm)
Wire	0.024	-	0.024	0.60
Wire	0.027	-	0.027	0.68
Wire	0.032	-	0.032	0.81
Wire	0.045	-	0.045	1.14
Wire	0.054	-	0.054	1.37
Wire	0.062	1/16	0.062	1.57
Pin	1.16	1/16	0.062	1.57
Pin	5.64	5/64	0.078	1.98
Pin	3.32	3/32	0.093	2.36
Pin	7.64	7/64	0.109	2.76
Pin	1.80	1/8	0.125	3.17
Pin	9.64	9/64	0.140	3.55
Pin	5.32	5/32	0.156	3.96
Pin	3.16	3/16	0.187	4.74
Pin	1.40	1/4	0.250	6.35
Pin	5.16	5/16	0.312	7.92



Movora
Local contact: www.movora.com/contact-us

Subject to technical changes.
©Movora 2025 . All rights reserved.
Doc. Nr.: MMKT-PC-0028-C